









Koehler-Bright Star LLC
 380 Stewart Road
 Hanover Township, PA 18706
 Tel: 570-825-1900 • Fax: 570-825-7108

Product Features

- Multiple options for recharging. Unit can be used with all Koehler chargers, including:
 - Legacy Koehler rack (10, 30 & 40 station) and single-unit chargers
- Regulated, consistent light output
 Maintains optimum brightness for entire run time
 Optimizes central & peripheral vision
- Multiple lighting modes at the press of a button
 - 1st press – Low setting
 - 2nd press – High setting, 100% brightness
 - 3rd press – Off
- Easy-to-view LED charge status indication on battery
 - Red – Charging
 - Green – Fully Charged
- Tracking and Proximity available

Specifications

Total Light Output		91 Lumens
Peak Beam Intensity		7000 Candela
Beam Distance		158 Meters
Run Time		28 Hours
Impact Resistance		1 Meter
Ingress Protection		IP68
Power Source		14.4 Ah Lithium-Ion Battery
Light Source		LED
Charge Time		8 hours max
Weight		1.9 lbs
Size		Lamp 2.1"W x 2.7"D Battery 3.5"W x 2.5"D x 5.2"H Cord 52"L
Operating Temperature		-20°C to +60°C

LI-5300-G LED Cap Lamp

includes cord and li-ion battery




LI5300-GF LED Cap Lamp

includes flasher cord and li-ion battery



5750-F Flasher Cord only

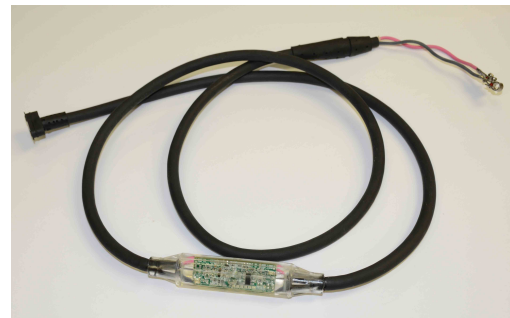

Our continuing commitment is why we have remained strong for 100 years, and why Koehler BrightStar remains a leader in underground lighting solutions. For more information, visit www.koehlerlighting.com

MSHA Part 18 certified • MSHA Part 19 certified