

## 2217LED Specifications

### Unit Information

Model #: 2217LED / Item #15460  
UPC-IC (12 Digit): 016731154608

**Unit Dimensions** Length: 8.1 in. (20.6 cm) Width: 2.3 in. (5.8 cm) at head

### Master Pack Dimensions


Weight: 9.9 lbs. (4.5 kg)  
Cube: 1.43 ft<sup>3</sup> (0.04 m<sup>3</sup>)  
Quantity: 24

### Safety Approvals

UL Protection Methods  
Intrinsically Safe  
Divisions 1 & 2  
Class I, II, III Div 1 Groups A-G  
Class I, II, III Div 2 Groups A-G  
Operating Temp T5

### Specifications

Power Source: 2x 'D' Cell Alkaline  
Light Source: LED  
Life: 30,000 hrs  
Runtime: 200 hrs  
Light Output: 80 Lumens  
Beam Distance: 100 Meters  
Weight (Without batteries): 5.0 oz (.13 kg)

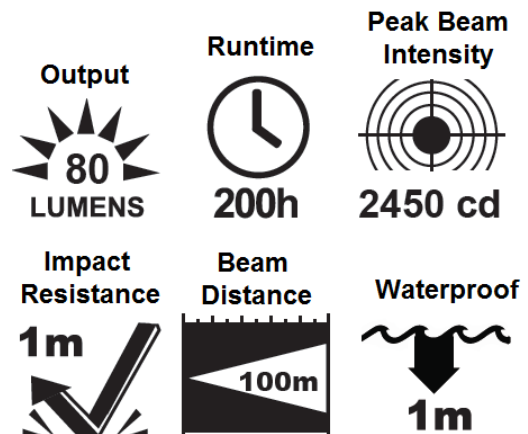

### Product Features

- For use in hazardous atmospheres
- 'S' Biner included for quick attachment
- Waterproof, IP67 rating
- 'Switch Guard' Prevents accidental lighting
- Three-way switch : On-Momentary-Off
- Anti-roll tube
- Faceted reflector for more light



### Accessories

23853  
23860

### Description

6 1/2" Red Snap In Wand  
6 1/2" Yellow Snap In Wand

**WorkSafe™ Model # 2217LED**

